

Assembly Instructions

Item No:

BGIO-QHB-DRLI / QUEEN HEADBOARD 5/0 W SPEAKERS AND LIGHTS

BGIO-QFB-DRLI / QUEEN 5/0 UPH FOOTBOARD WITH SLATS

BGIO-QKR-DRLI / QUEEN-KING 5/0-6/6 UPHOLSTERED RAILS







BEFORE ASSEMBLY





Thank you for purchasing this quality product. This product has been designed for easy assembly and constructed for durability.


Please take time to read and follow assembly instructions carefully.

Part List

When unpacking, please be careful not to discard any parts with packaging. Before continuing, please make sure you have following parts:


PARTS LIST OF BGIO-QHB-DRLI	
	Headboard: 1Pc
	HB Post Leg- R: 1Pc
	HB Post Leg- L: 1Pc
	Wood Block: 2Pcs
	Support Bar: 1Pc
	Adapter: 1Pc
	Power Cable: 1Pc

PARTS LIST OF BGIO-QFB-DRLI	
	Footboard: 1Pc
	Slat Roll: 13Pcs/1Set
	Top Center Rail Support: 1Pc
	Base Center Rail Support: 1Pc
	Center Slat Support Leg: 5Pcs

PARTS LIST OF BGIO-QKR-DRLI	
	Side Rail: 2Pcs


BGIO-QHB-DRLI HARDWARE LIST			
NO.	DRAWING	DES.	QTY
H1		Allen Bolt Ø5/16 x 50mm	14 Pcs
H2		Spring Washer Ø5/16	10 Pcs
H3		Flat Washer Ø5/16 x 19mm	10 Pcs
H4		Allen Key #4 x 60mm	1 Pc

BGIO-QFB-DRLI HARDWARE LIST			
NO.	DRAWING	DES.	QTY
H5		Screw #4 x 30mm	26 Pcs
H6		Allen Bolt Ø1/4 x 38mm	4 Pcs
H4		Allen Key #4 x 60mm	1 Pc

BGIO-QKR-DRLI HARDWARE LIST			
NO.	DRAWING	DES.	QTY
H7		Full - Thread Bolt Ø5/16 x 80mm	8 Pcs
H8		Flat Washer Ø5/16 x 22mm	8 Pcs
H9		Hex Nut	8 Pcs
H10		Open Wrench	1 Pc

Step 1


Attach the Wood Block (D) to the HB Post Leg (B) & (C) by using Blot (H1) with the Allen Key (H4).

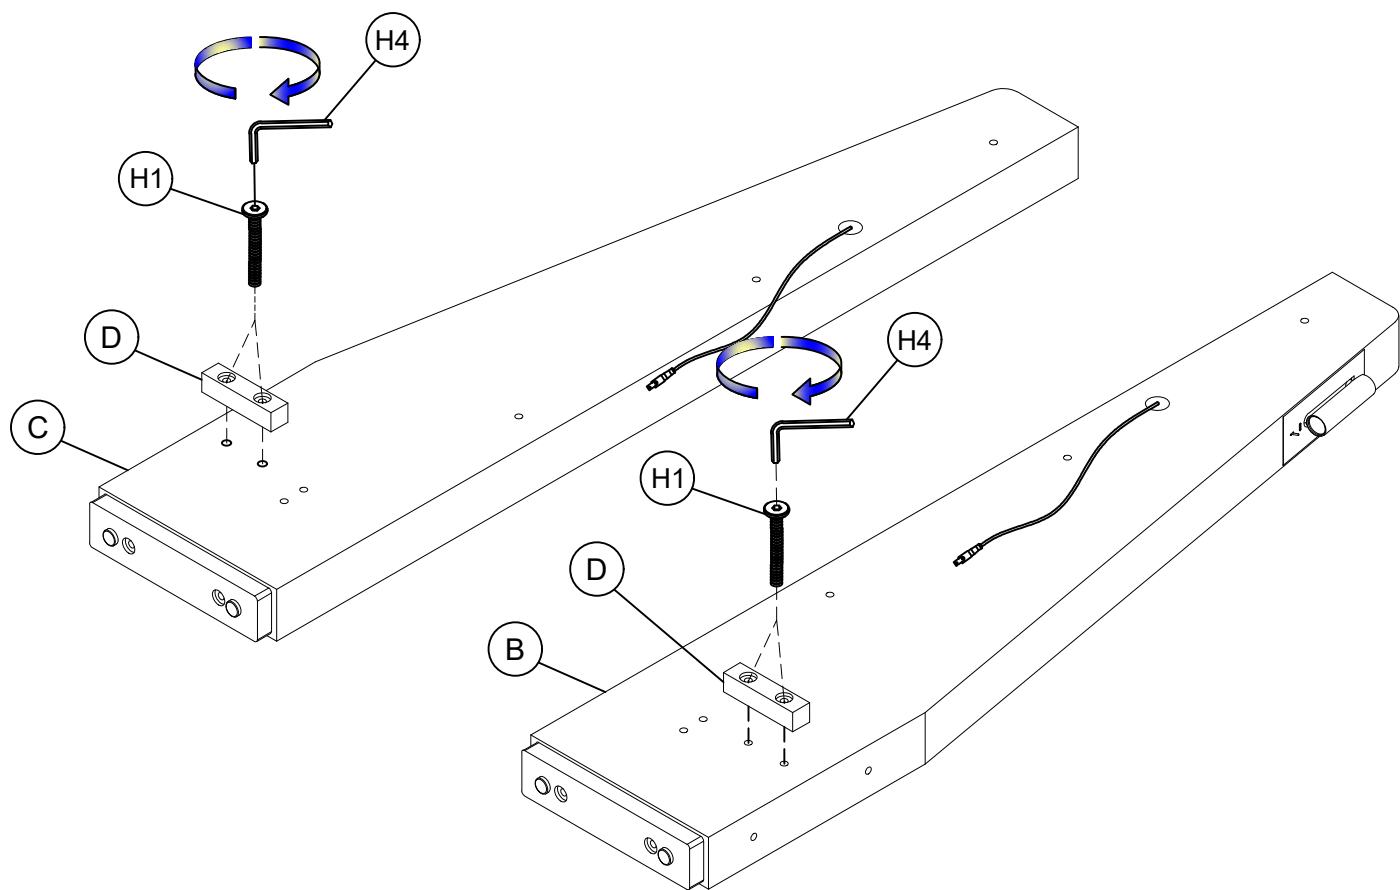

H1		Allen Bolt Ø5/16 x 50mm	4 Pcs
H4		Allen Key #4 x 60mm	1 Pc

Step 2


Attach the HB Post Leg (B) & (C) to the Headboard (A) by using Flat Washer (H3), Spring Washer (H2), Bolt (H1), tighten with Allen Key (H4).

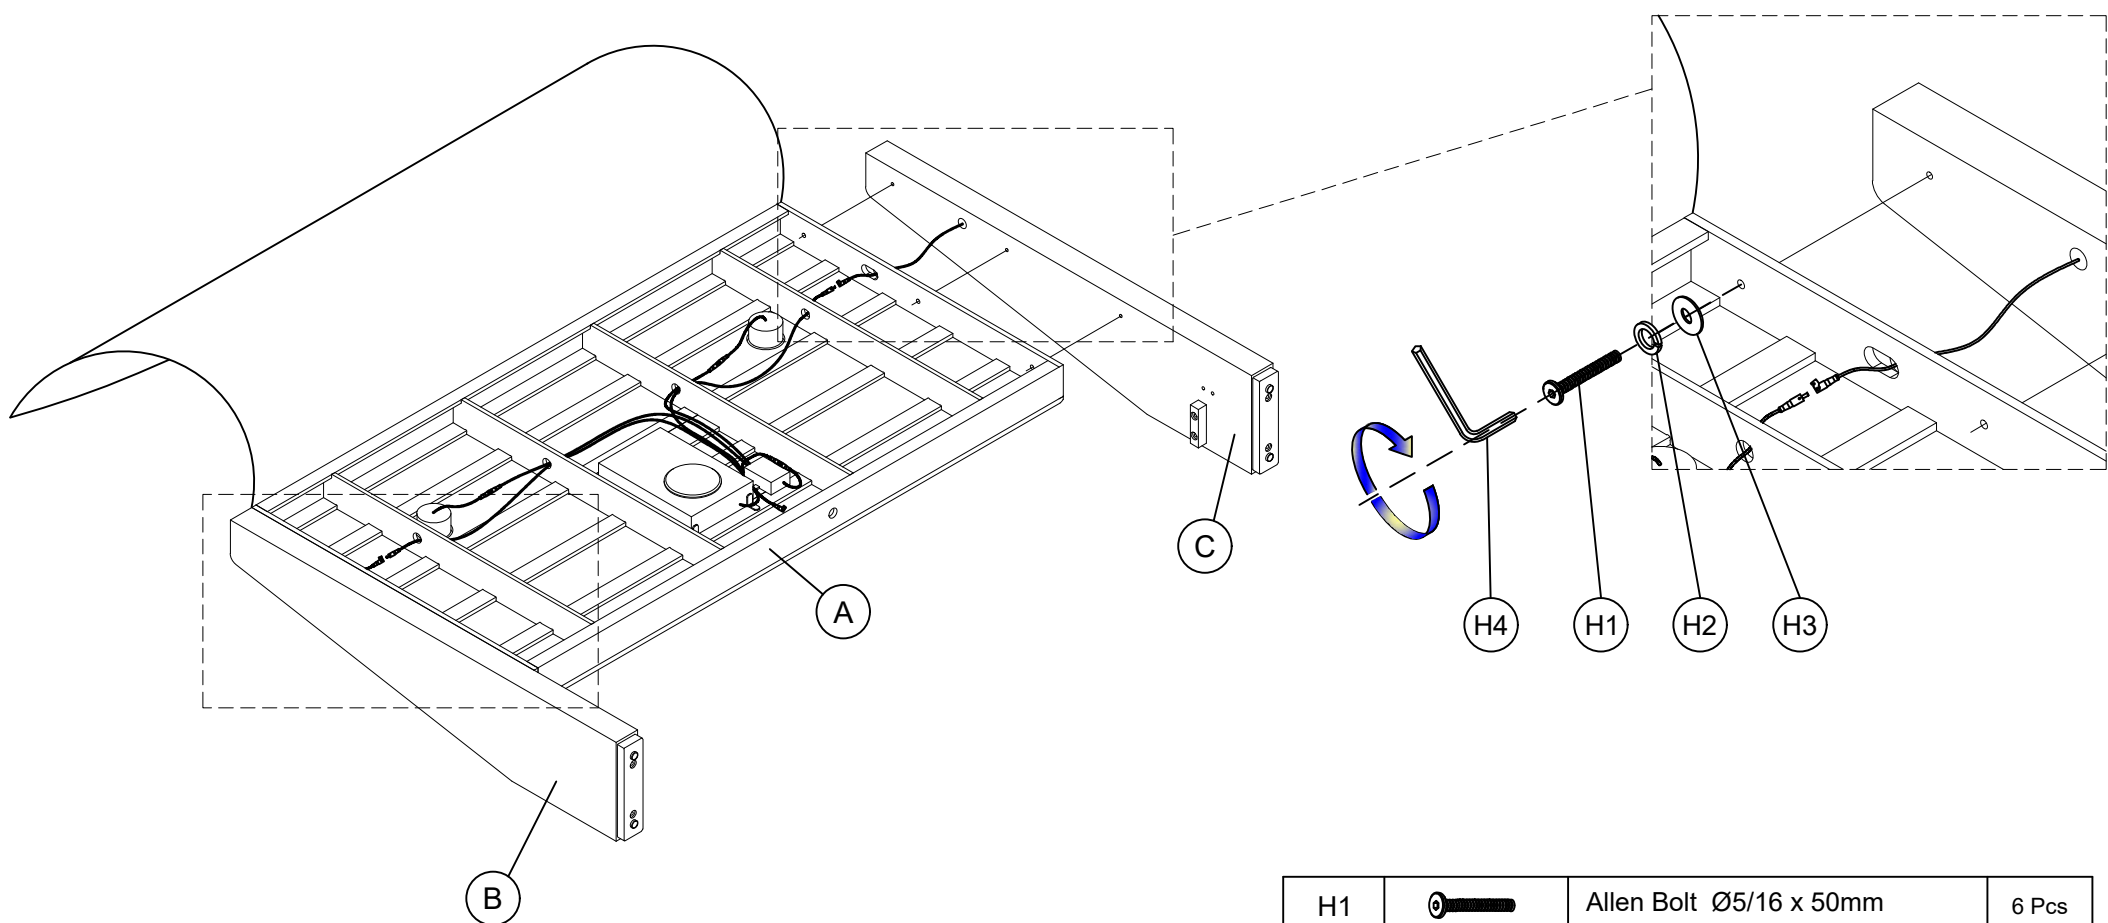

H1		Allen Bolt Ø5/16 x 50mm	6 Pcs
H2		Spring Washer Ø5/16	6 Pcs
H3		Flat Washer Ø5/16 x 19mm	6 Pcs
H4		Allen Key #4 x 60mm	1 Pc

Step 3


Attach the Support Bar (E) to the HB Post Leg (B) & (C) by using Flat Washer (H3), Spring Washer (H2), Bolt (H1), tighten with Allen Key (H4).

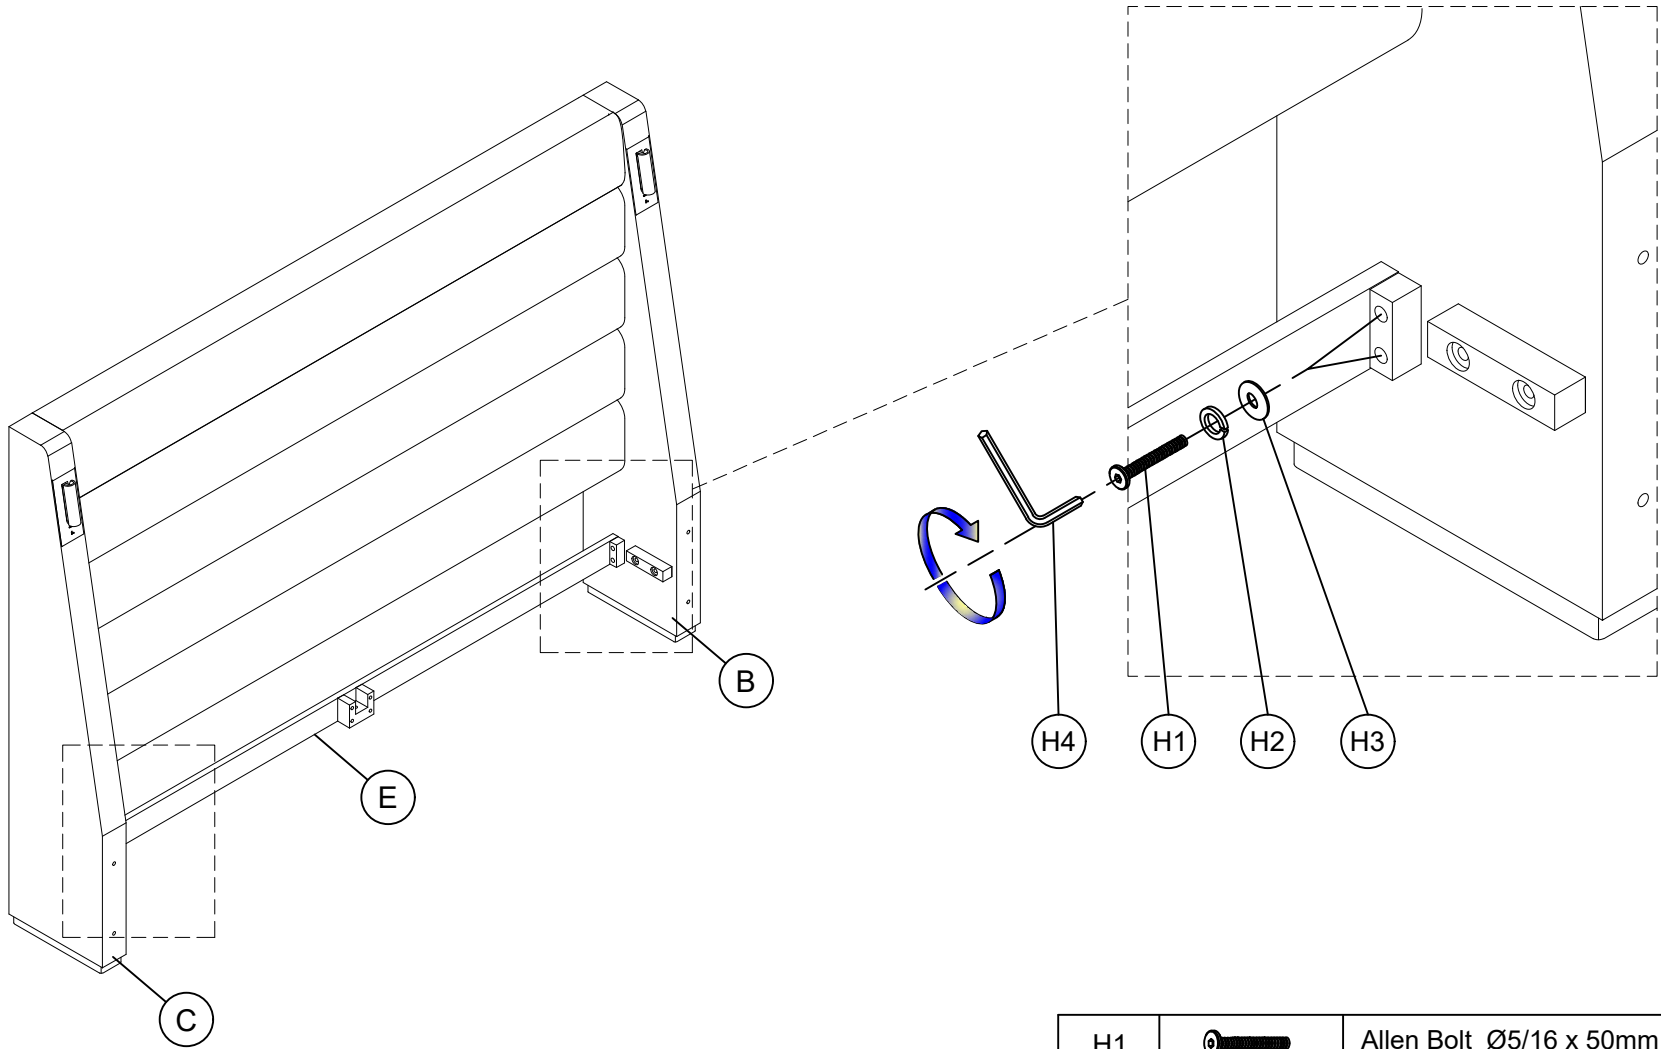

H1		Allen Bolt Ø5/16 x 50mm	4 Pcs
H2		Spring Washer Ø5/16	4 Pcs
H3		Flat Washer Ø5/16 x 19mm	4 Pcs
H4		Allen Key #4 x 60mm	1 Pc

Step 4


Attach Headboard (A) and Footboard (H) to Side Rails (N) by using Hex Nut (H9), Flat Washer (H8) and Full -Thread Bolt (H7), tighten with Open Wrench (H10).

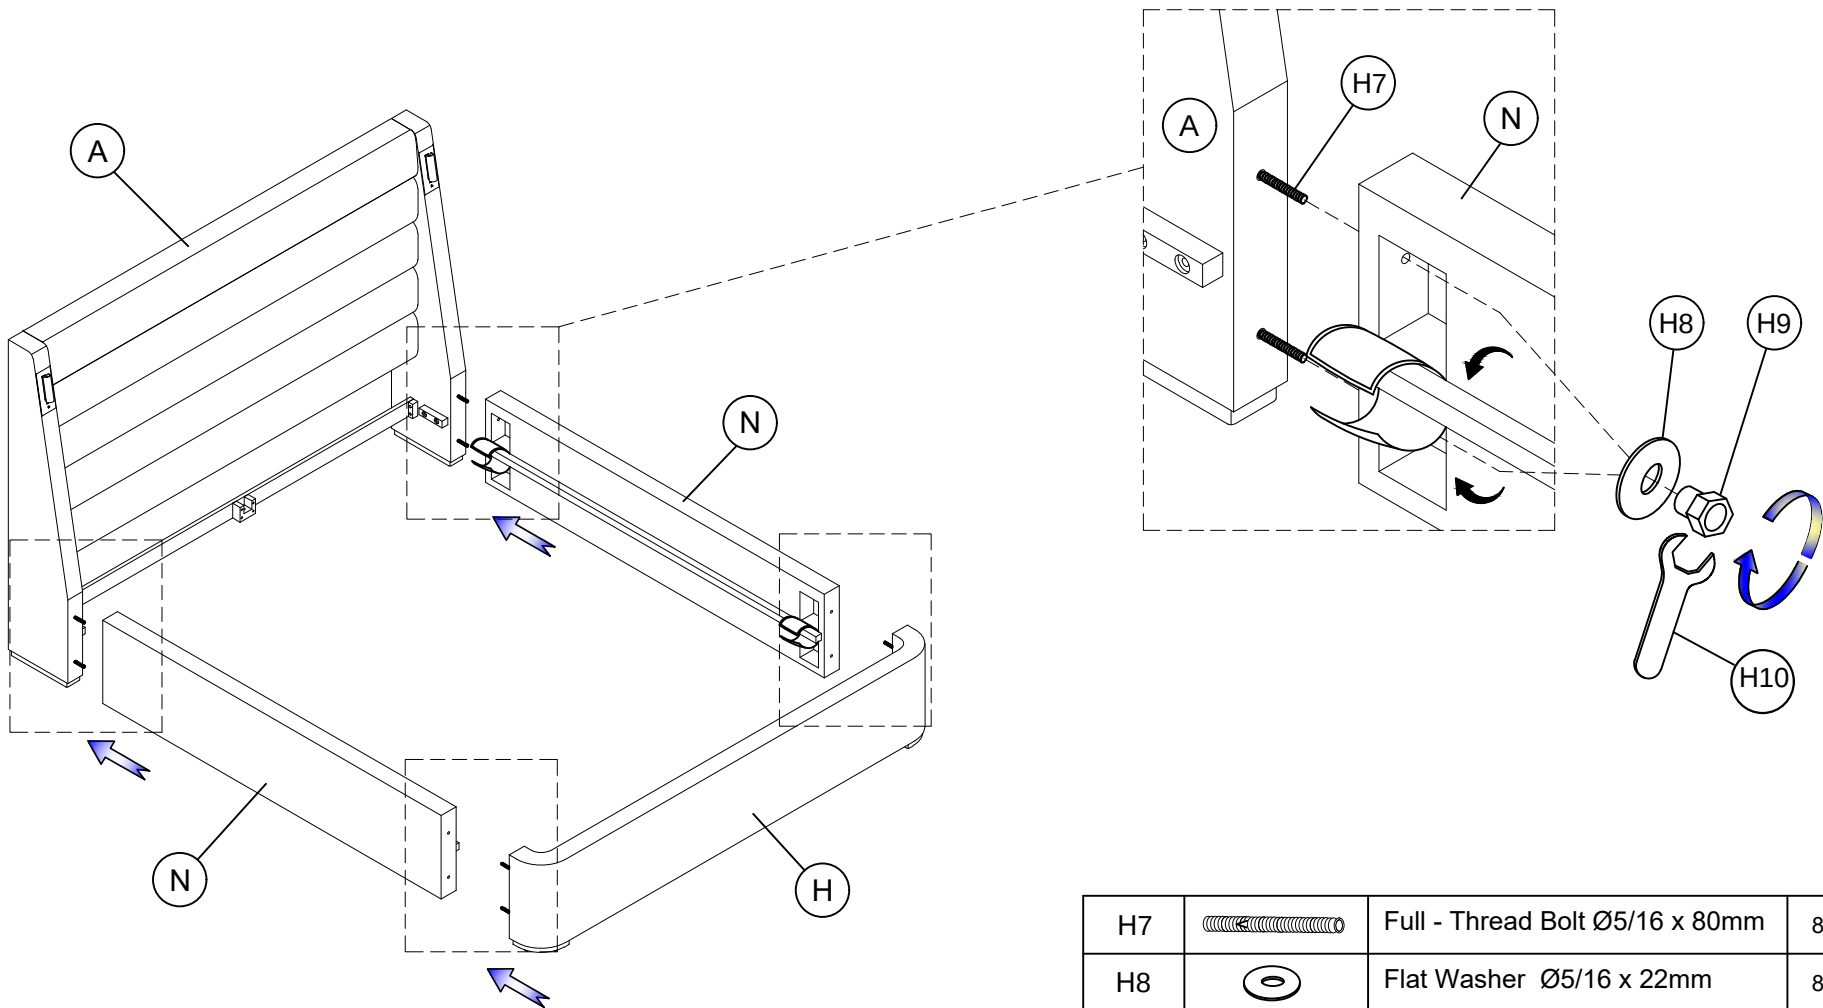

H7		Full - Thread Bolt Ø5/16 x 80mm	8 Pcs
H8		Flat Washer Ø5/16 x 22mm	8 Pcs
H9		Hex Nut	8 Pcs
H10		Open Wrench	1 Pc

Step 5


Attach the Top Center Rail Support (J) to the Base Center Rail Support (K) by using Bolt (H6), tighten with Allen Key (H4).

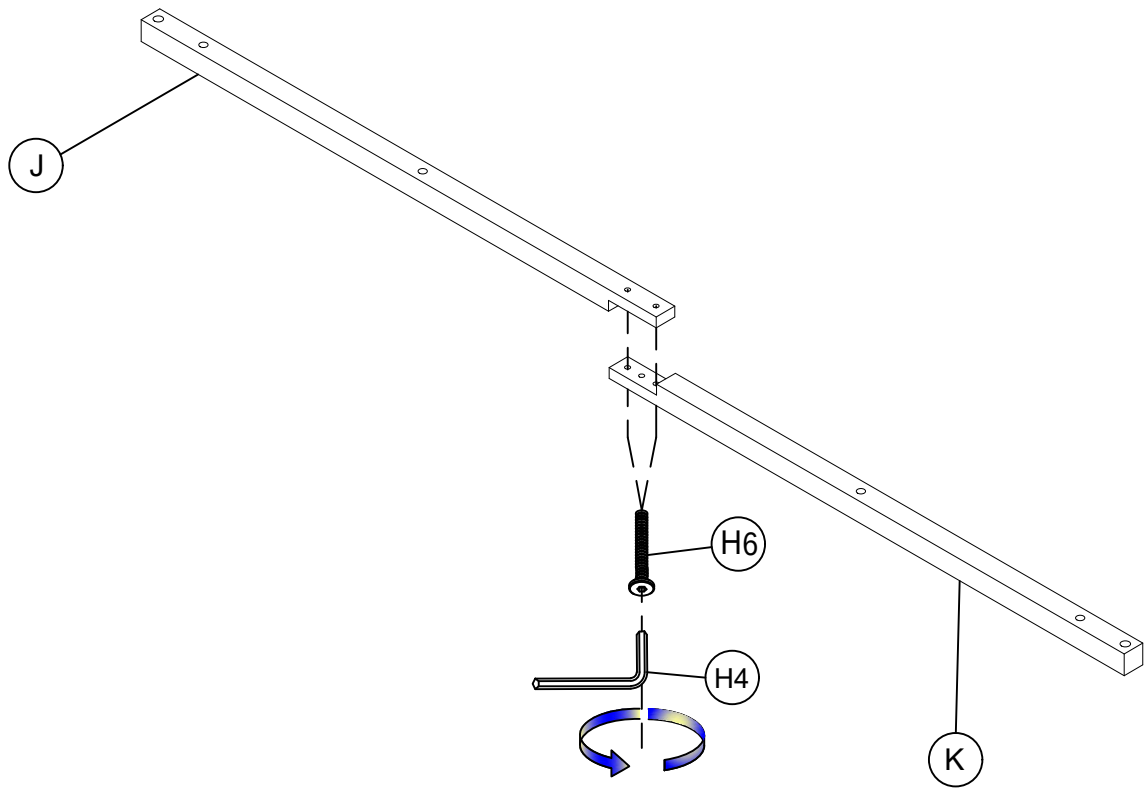

H6		Allen Bolt Ø1/4 x 38mm	2 Pcs
H4		Allen Key #4 x 60mm	1 Pc


Step 6

Screw Center Support Legs (L) onto Center Rail Support (J&K). Support leg heights can be adjusted by screwing (shortening) or unscrewing (raising) the leveler.

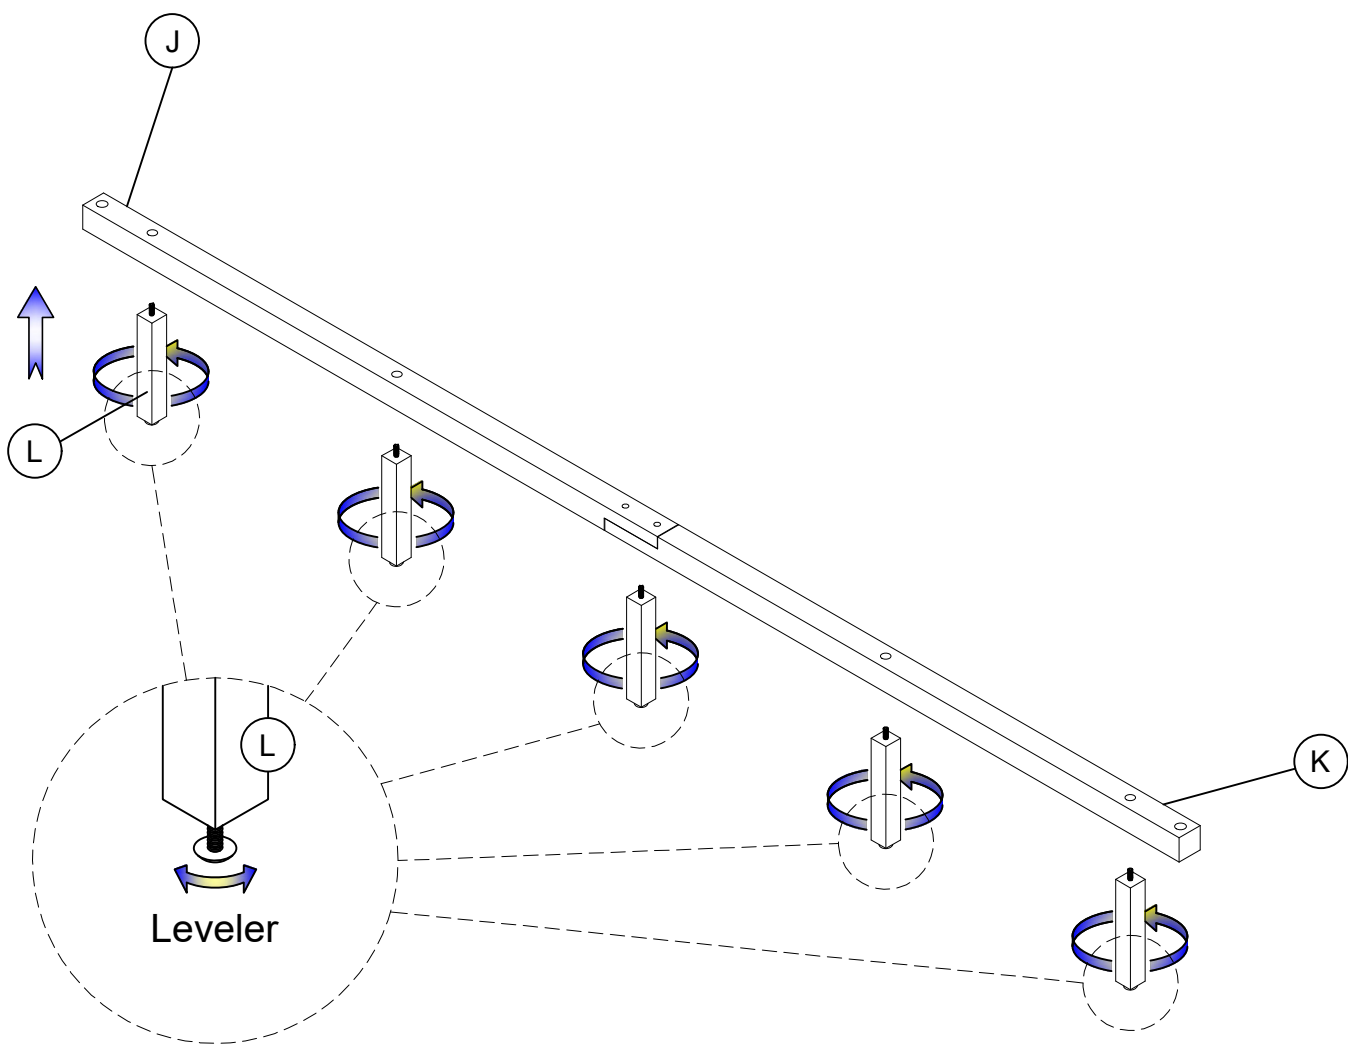

Step 7


Attach Center Rail Support (J&K) to Headboard (A) and Footboard (H) by using Bolt (H6), tighten with Allen Key (H4).

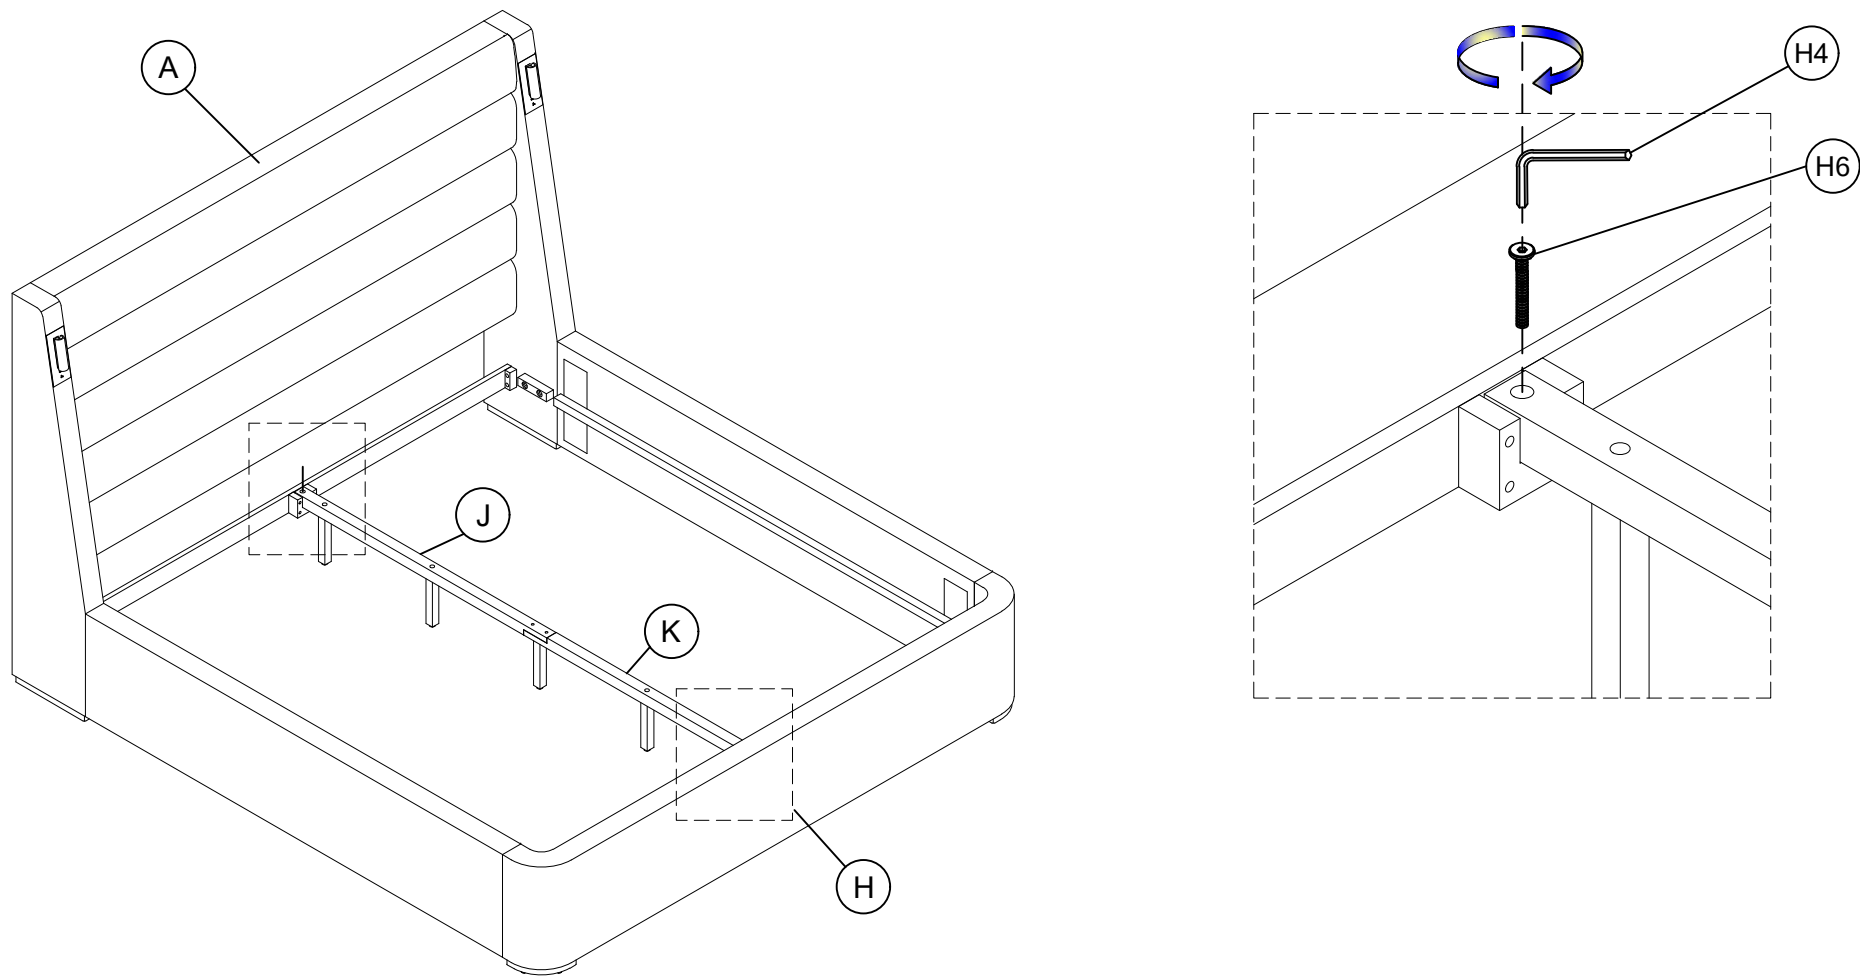

H6		Allen Bolt Ø1/4 x 38mm	2 Pcs
H4		Allen Key #4 x 60mm	1 Pc


Step 8

Open Slats Roll (I) and place on Bed.

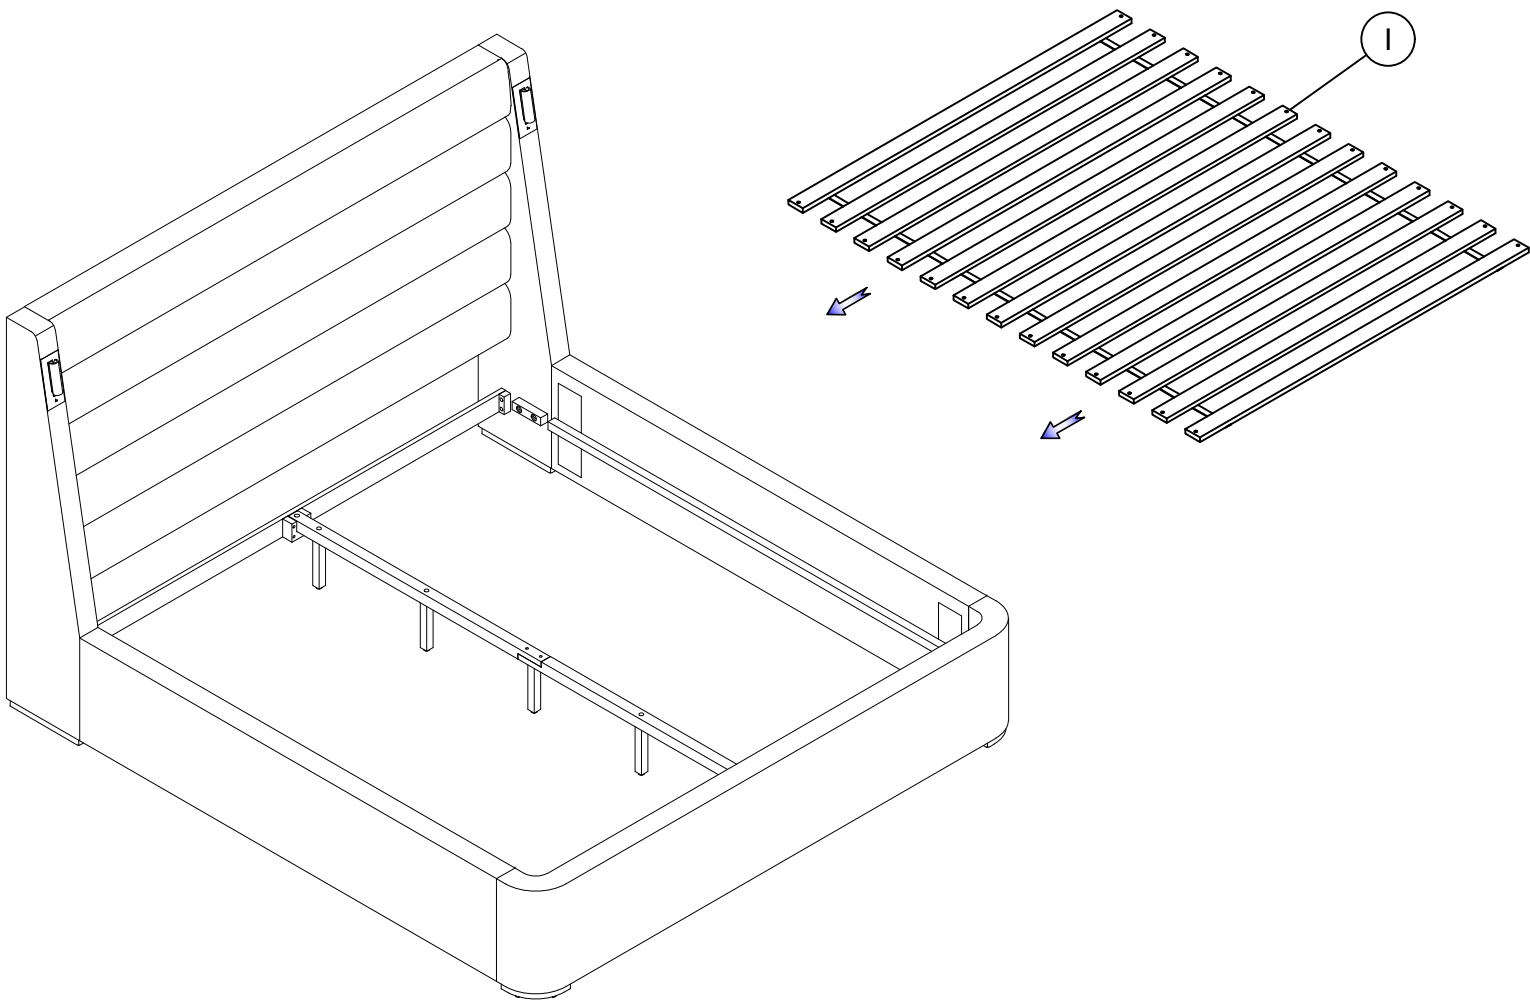

Step 9

Secure Slats (I) by using screws (H5).

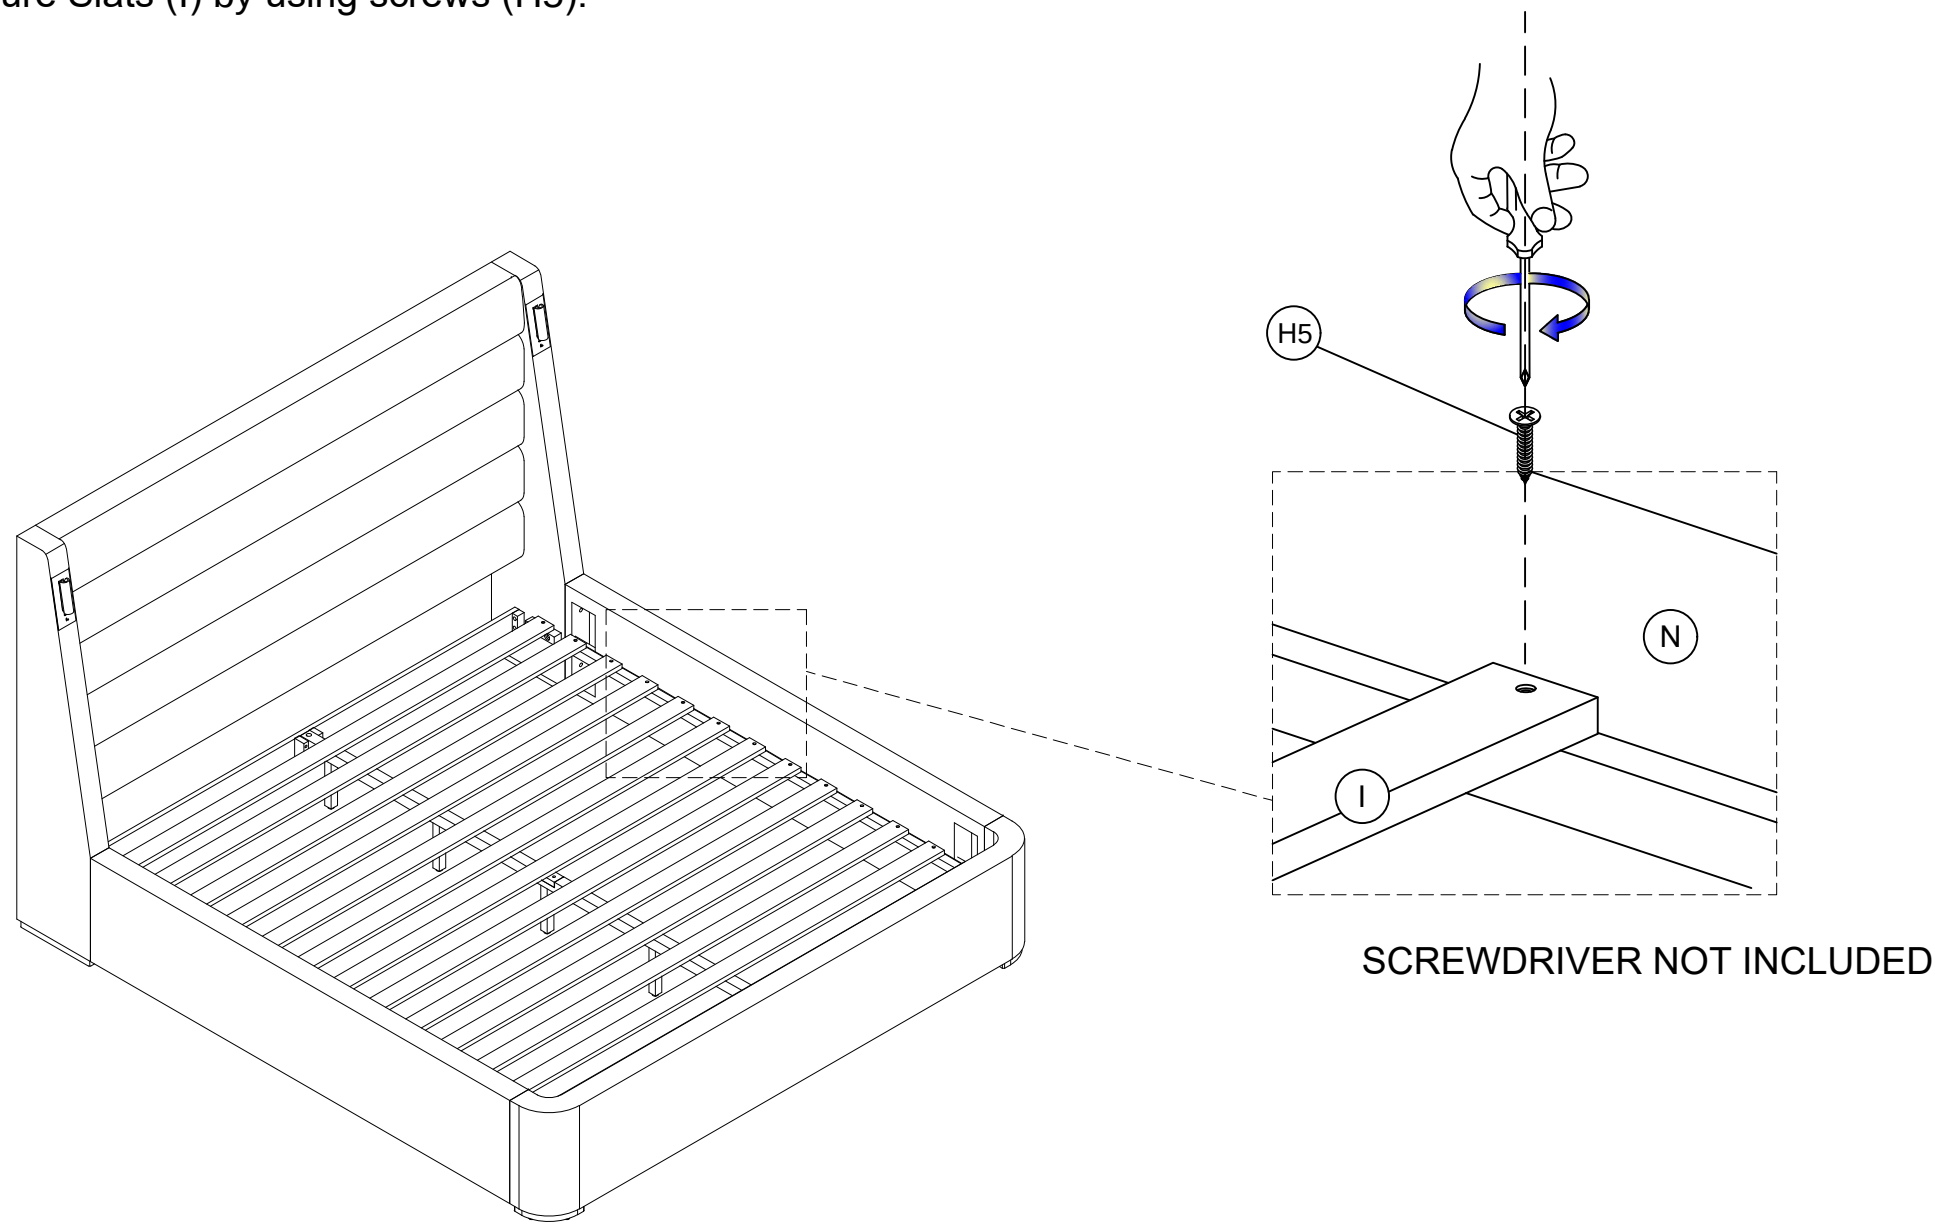


SCREWDRIVER NOT INCLUDED

H5		Screw #4 x 30mm	26 Pcs
----	---	-----------------	--------


Step 10

Connect the Power Cable (G) to Adapter (F).

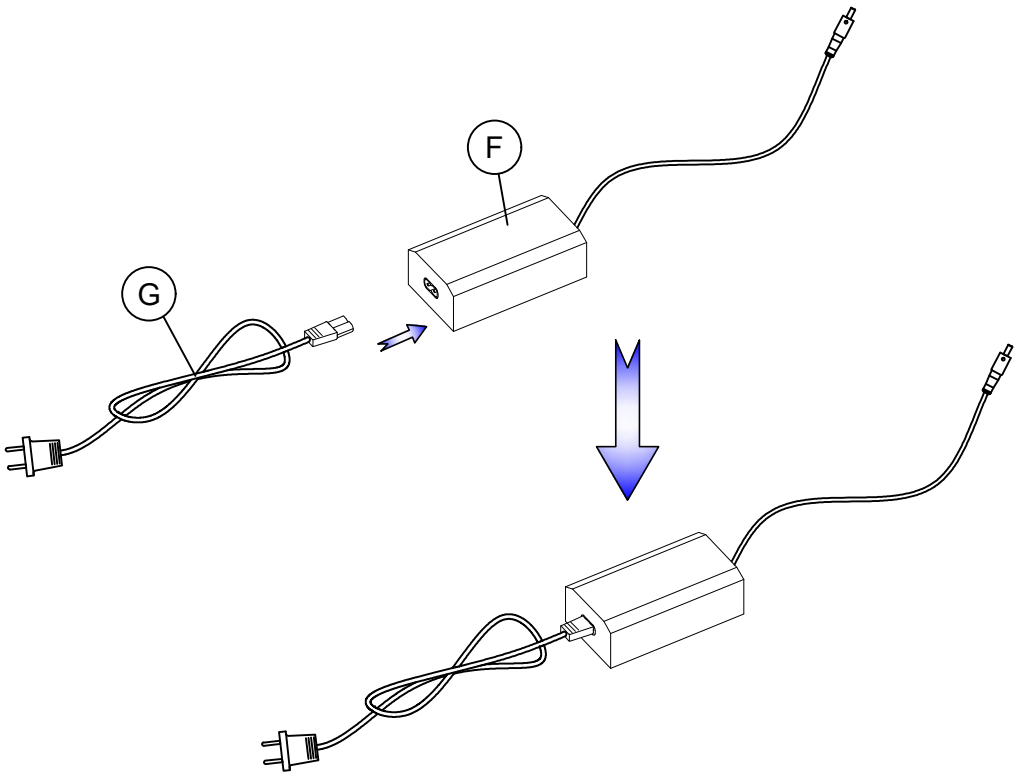


Step 11

Connect the plugs of Headboard (A) and HB Post Leg (B) & (C).
And plug in to supply power.

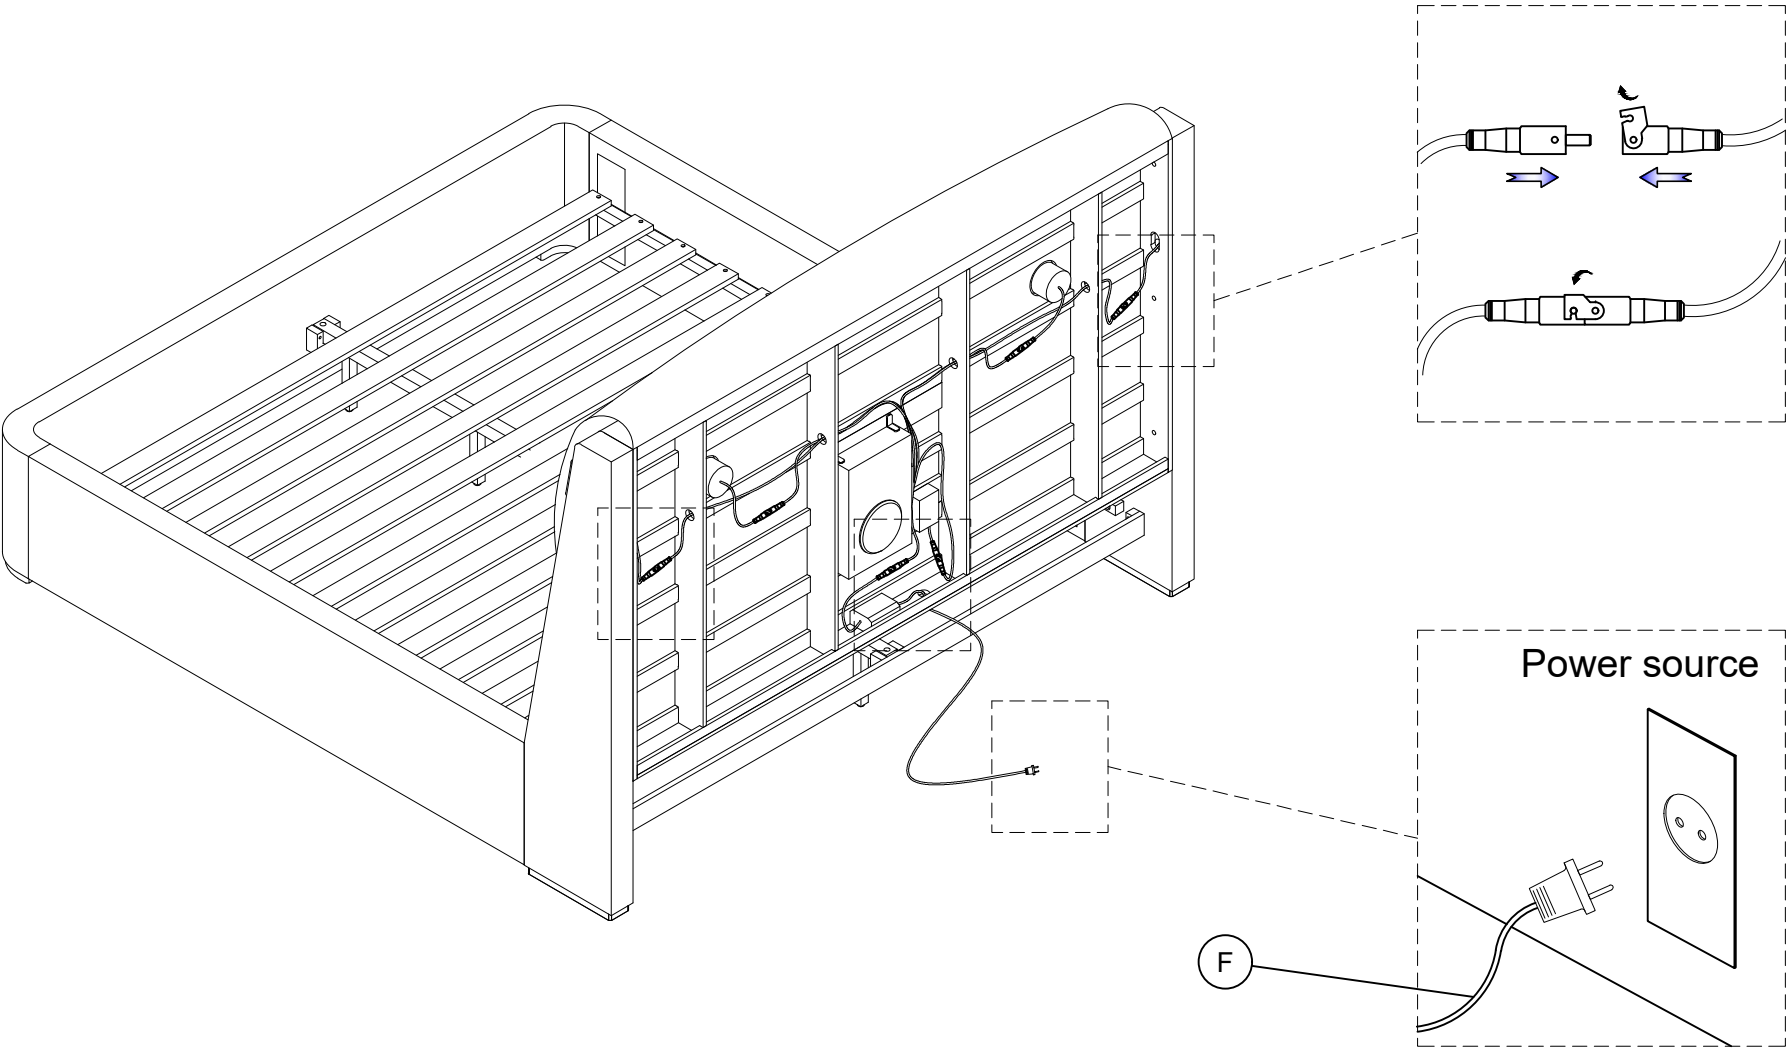

Step 12

Reading light user guide.

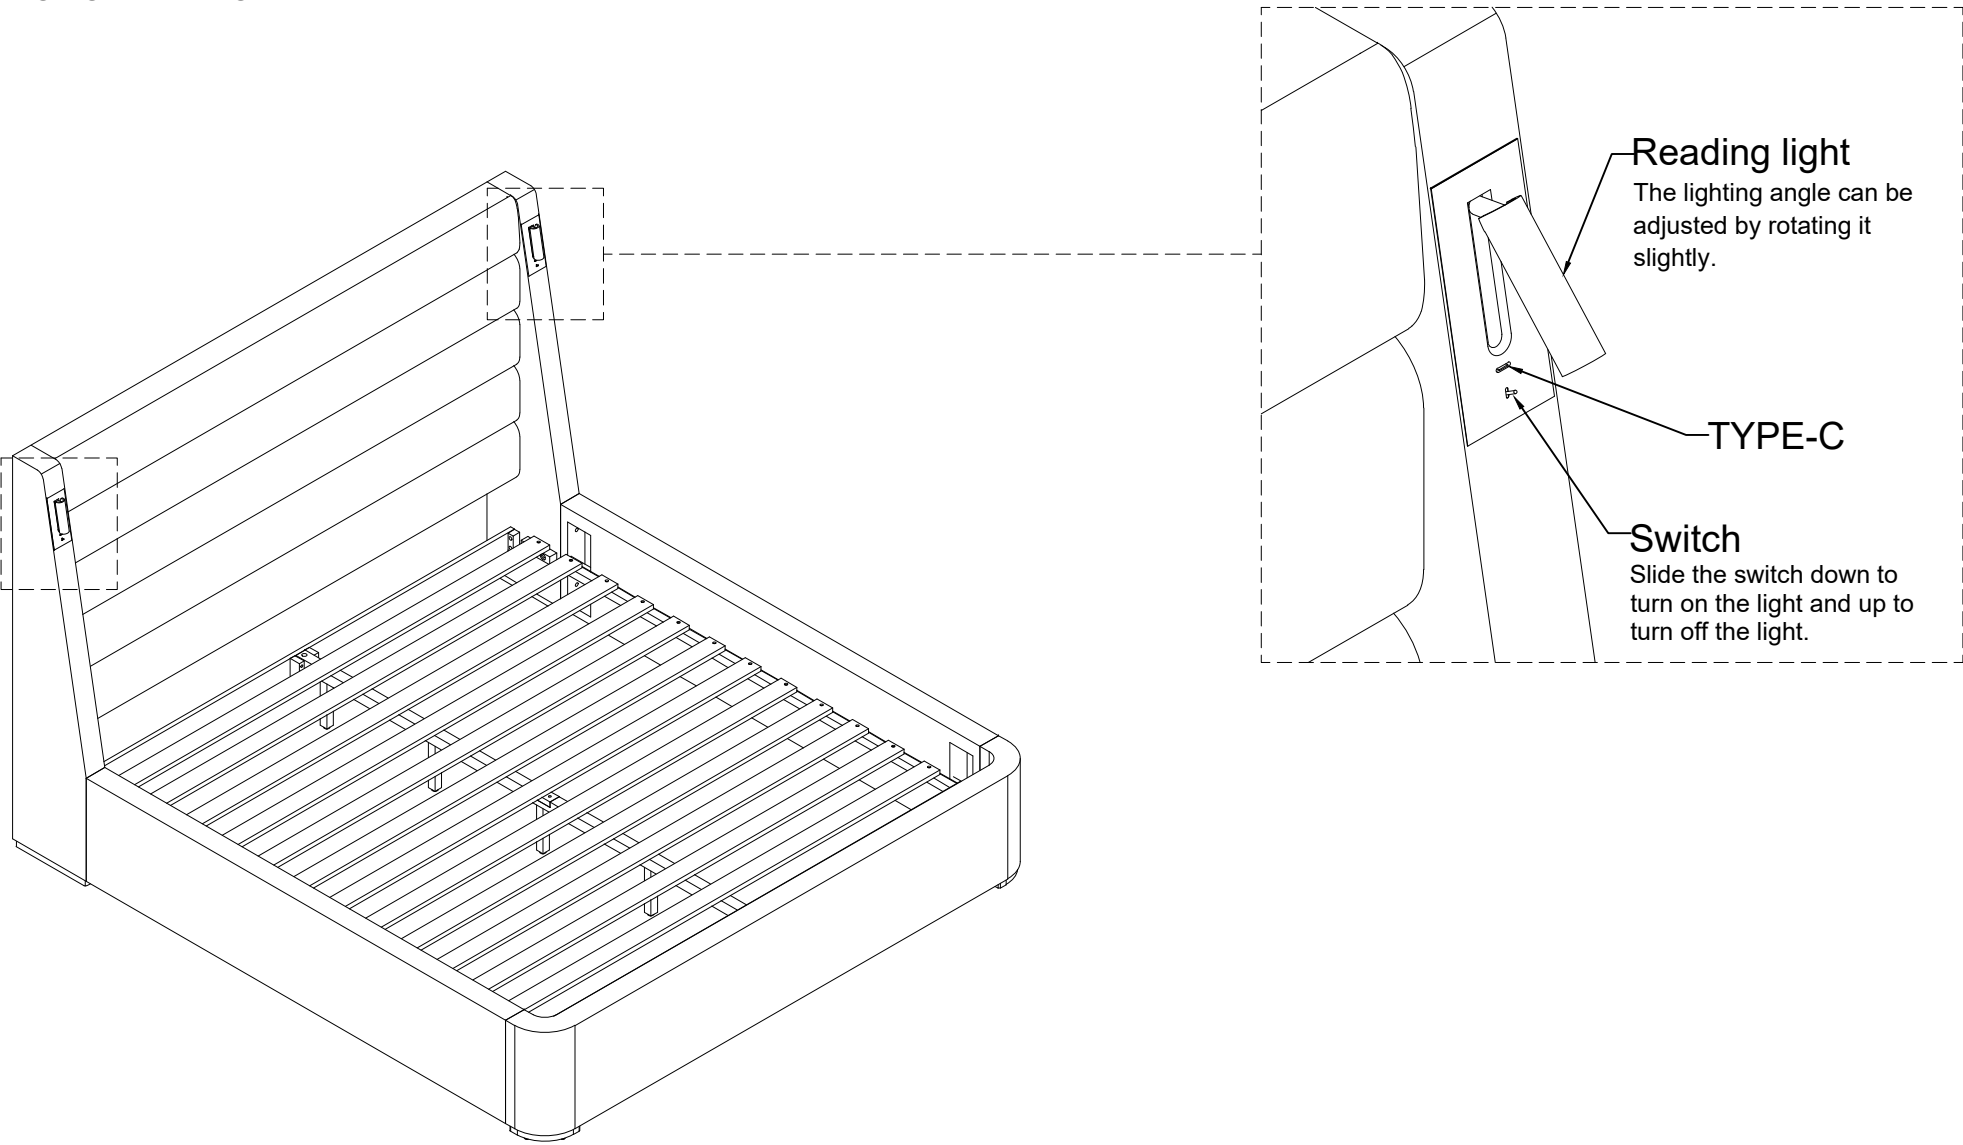

Bluetooth Speaker Functions

Bluetooth Name: Giorgio

1. Complete all wiring connections according to the assembly diagram and power on the unit.
2. The device powers on automatically once energized and enters Bluetooth search mode. Voice prompt: Power on, wait for preparing.
3. Enable Bluetooth on your mobile phone, search for the device named Giorgio and complete pairing. A voice prompt "Bluetooth Connected" will play once pairing succeeds.
4. Play music on your phone. You can control playback via your phone, including play/pause, previous track, next track, volume up and volume down.
5. The Bluetooth connection will disconnect when power is cut off. You may also disconnect Bluetooth via your mobile phone, with the voice prompt "Bluetooth Disconnected" triggered.

Type-C Charging Function

1. The lamp base is equipped with a Type-C charging port. It starts charging once powered on, supporting charging for mobile electronic devices with standard Type-C data cables.

Product Parameters

Item	Parameter
Power Input	DC 20V 4.5A
Rated Power	83W
Speaker Power	13W*2+25W
Bedside Lamp Output	3W*2
Bluetooth Version	5.3
Type-C Output	Max. 18W

Troubleshooting

Fault	Possible Causes & Solutions
Cannot power on	1. No power supply connected. 2. Broken wires or loosely inserted plugs. 3. Faulty wall socket.
Bedside lamp fails to light up	1. Check whether all connecting wires are correctly and firmly plugged in.
No sound output	1. The volume knob is set to the minimum level. 2. The device is not switched to the correct function mode. 3. The speaker extension wire is disconnected; inspect all wiring harnesses and re-connect them. 4. If the above solutions do not work, please contact the store or customer service for support.
Failed Bluetooth connection	1. Turn off all other paired devices and retry, or wait a few seconds and restart the device before pairing again. 2. Do not pair behind walls, in corners or other obstructed areas; keep the distance between the device and your phone within 8 meters. 3. Select the device named "Giorgio" for pairing.
Music playback is occupied by another device	1. Bluetooth auto-reconnection function causes cross-device linkage. Check if your phone is paired with two Bluetooth devices simultaneously, unpair one of them and tap the play button on your phone.