

# CVW1ZP009

## Flush-Mount Fixture


### Installation and Wiring Instructions


**Note: ALWAYS TURN POWER OFF BEFORE INSTALLING LIGHTING FIXTURES!**  
**NOTE: TOUJOURS METTRE HORS TENSION AVANT D'INSTALLER DES LUMINAIRES.**

#### Installation (see Fig.A)

1. Disconnect power at main electrical panel before installation.
2. Thread the **mounting screws** into the **same side** of the **mounting strap** as the **GREEN ground screw**.
3. Guide **fixture wires** through hole in center of **mounting strap**.
4. Follow wiring instructions carefully (listed below).
5. Attach **mounting strap** to **outlet box** using **box screws** provided with **outlet box**.
6. Mount fixture by aligning **mounting holes** in **base** with **mounting screws**, positioning the **mounting screw** heads through the large openings of the keyhole shaped slots. Rotate the fixture to seat the **mounting screws**, tighten **mounting screws** securely.
7. Insert rattan leaf into the lamp body

#### COMPONENTS

|   | F                                                                                     |      |                                                                                       |
|---|---------------------------------------------------------------------------------------|------|---------------------------------------------------------------------------------------|
|   |   | 1ps  |                                                                                       |
| A |  | 3pcs |  |
|   |  | 1ps  |  |
|   |  | 2pcs |  |
| D |  | 2pcs |  |
| E |  | 2pcs |  |



1ps


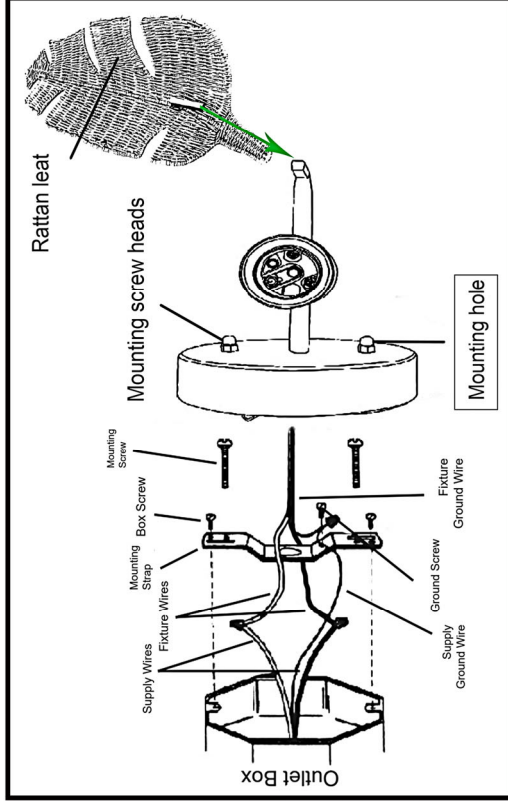


Fig.A

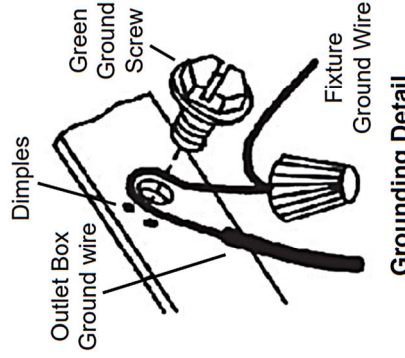

|                                                         |                                                         |
|---------------------------------------------------------|---------------------------------------------------------|
| Connect Black or Red House Wire to:                     | Connect White House Wire to:                            |
| Black                                                   | White                                                   |
| Parallel cord - SPT I & II (round & smooth)             | Parallel cord - SPT I & II (square & ridged)            |
| Clear, Brown, Gold or Black (without tracer)            | Clear, Brown, Gold or Black (with tracer)               |
| Insulated Wire (Other than GREEN) with copper conductor | Insulated Wire (Other than GREEN) with silver conductor |

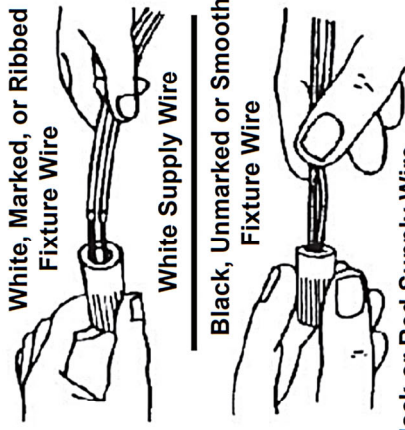


Fig. B

**CAUTION - RISK OF FIRE. FOR SUPPLY CONNECTIONS USE MINIMUM 90°C SUPPLY CONDUCTORS. MOST DWELLINGS BUILT BEFORE 1985 HAVE SUPPLY WIRE RATED 60°C. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTORS.**