


Assembly Instructions

Veracruz Console Loveseat

BEFORE ASSEMBLY


Thank you for purchasing this quality product. This product has been designed for easy assembly and constructed for durability. Please take the time to read and follow the assembly instructions carefully.

Power Zero Gravity Tilt Console Loveseat P2

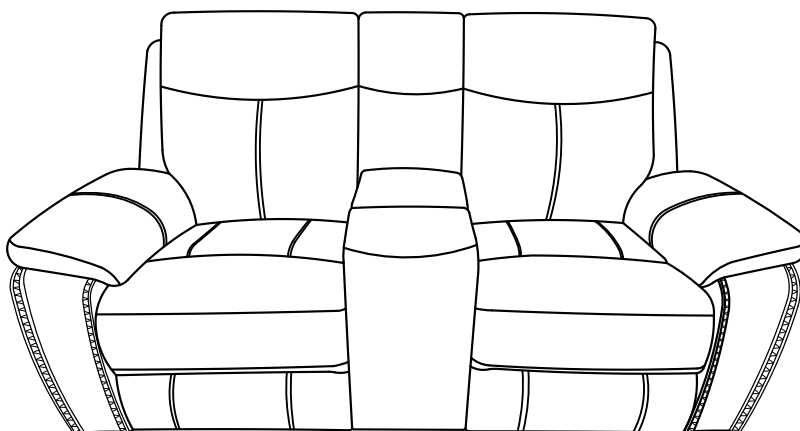


Part List

When unpacking, please be careful not to discard any parts with the packaging. Before continuing, please make sure you have the following parts:

No	Description	Sketch	Qty
A	Body		1PC
B	LAF Back Cushion		1PC
C	Console Back Cushion		1PC
D	RAF Back Cushion		1PC
E	LAF Wing		1PC
F	RAF Wing		1PC
G	Knob Nut		2PCS
H	Threaded Rod		2PCS
J	Power Adapter		1PC


Step 1

1. Remove the Power Adapter (J) from the bottom of the Body (A).

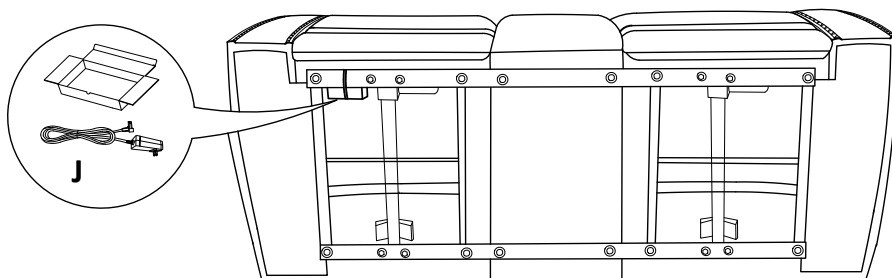


Step 2

1. Locate the Console Back Cushion (C) stored underneath the Body (A). Pull it out from the rear of the Body (A).
2. Remove the LAF Wing (E) and RAF Wing (F) secured to the back of the Main Body (A).

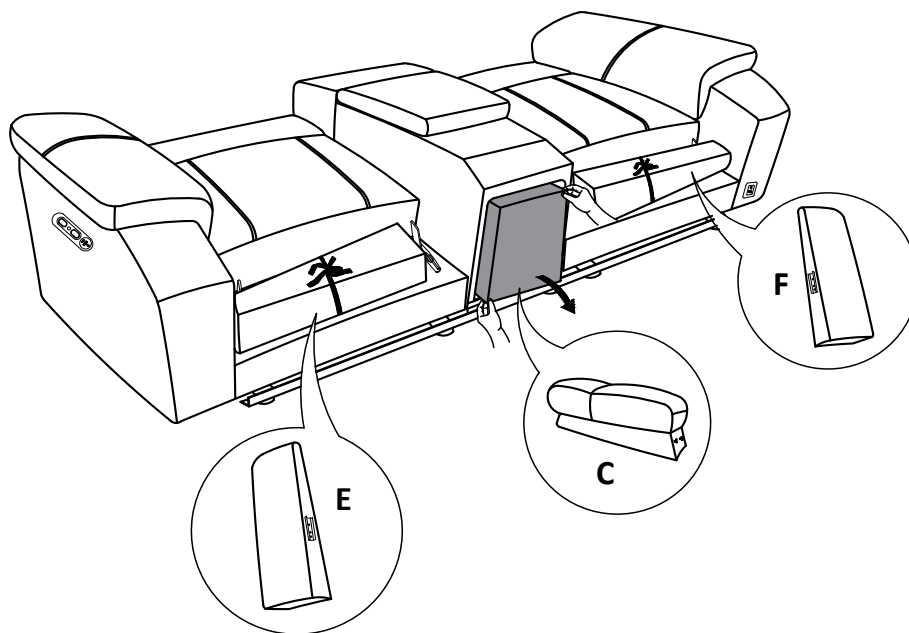


Step 3

- Unscrew the knob nut (G) from the Middle console back cushion (C).

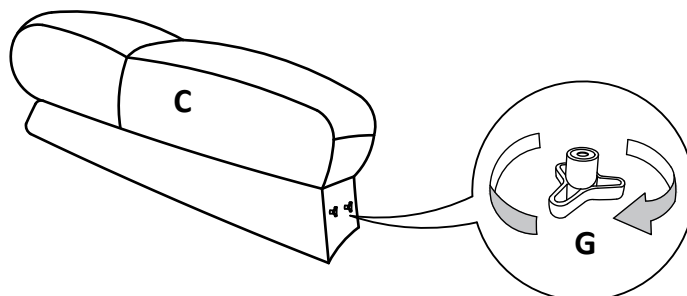

Step 4


Install the Middle Console back cushion by aligning the Threaded Rods (H) on the backrest with the pre-drilled holes in Body (A). Ensure the threaded rods are properly aligned with the holes, then firmly press the backrest downward into position. From the rear of Body (A), install the Knob Nuts (G) onto the threaded rods and tighten them clockwise until the backrest is securely fastened.

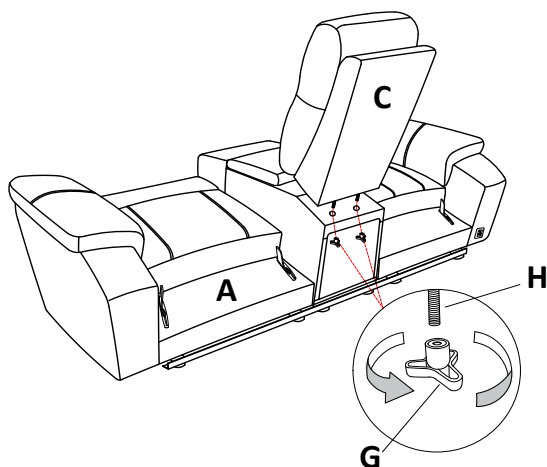

Step 5


1. Install the Back Cushions (B/D) onto the Body (A) by aligning the female metal receiver brackets on the back cushions with the male metal posts on the Body. Ensure the female metal receiver brackets on both sides of each back cushion are properly aligned with the corresponding male metal posts on the Body. Press down evenly on both sides of the back cushion until it locks into place and you hear an audible "click."

2. Connect the headrest (B, D) located at the bottom of the Back Cushions to the corresponding connector at the back of the Body (A). Make sure the locking latch is fully engaged and securely closed to prevent the connection from becoming loose during use.

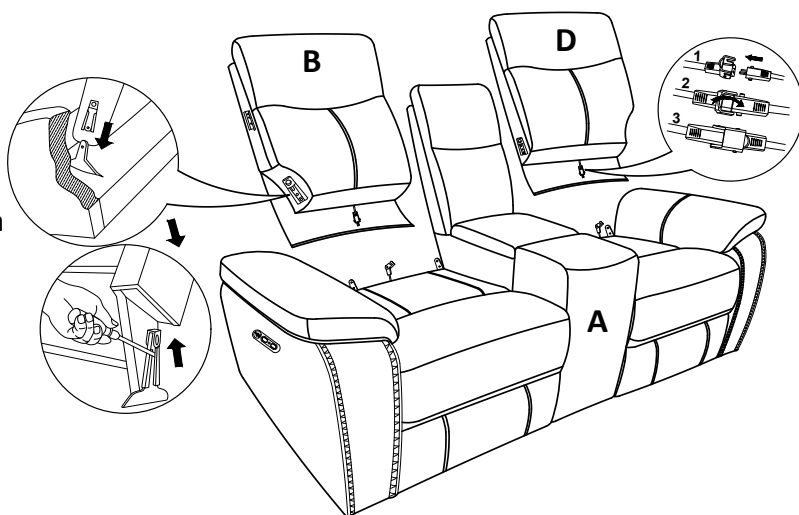


Step 6

Install the LAF Wing (E) and RAF Wing (F) by sliding wings in a downward motion along the side of the seat back to connect the brackets.

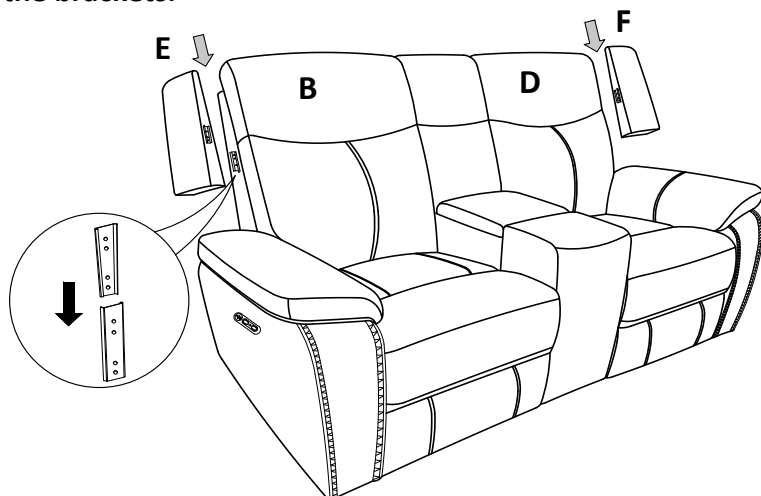


Step 7

1. Attach the flap to the seat frame by pulling the flap down, and pressing the bottom under the seat base, connecting the velcro.
2. Attach the flap to the edges of the LAF Wing and RAF Wing, then secure it by firmly pressing the Velcro fasteners to gether.

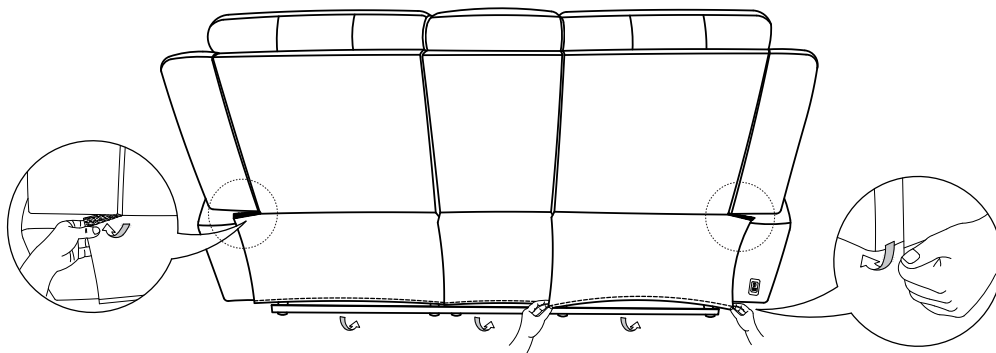

Step 8

1. Plug end of the power cord on the back of the console into a wall outlet/power strip.
2. Securely connect one end of the power adapter to the DC power port located at the lower rear corner of the recliner. Plug the other end into a wall outlet/power strip. Your recliner is now ready for use.

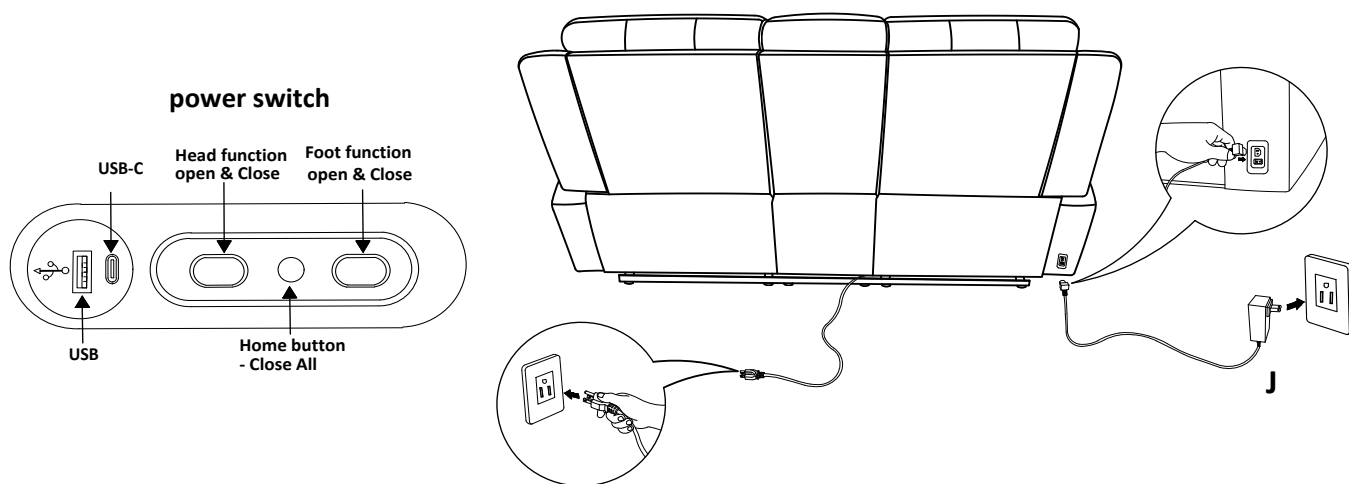

Function Display

