


Power Console Loveseat

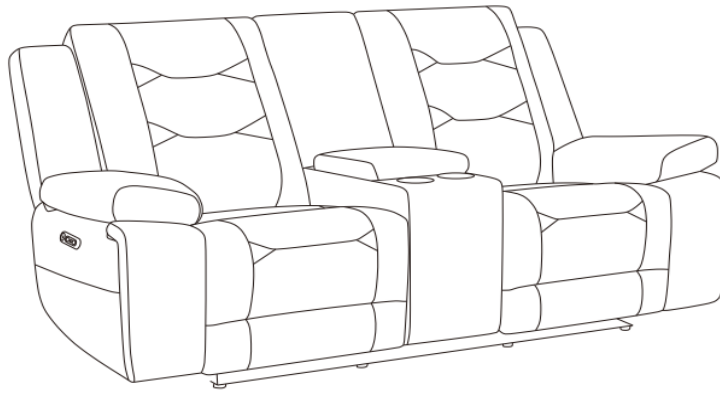


Part List

When unpacking, please be careful not to discard any parts with the packaging. Before continuing, please make sure you have the following parts:

No	Description	Sketch	Qty
A	Body		1 PC
B	LAF Back Cushion		1 PC
C	Middle Back Cushion		1 PC
D	RAF Back Cushion		1 PC
E	LAF Wing		1 PC
F	RAF Wing		1 PC
G	Screw Base		3 PCS
H	Screws		3 PCS

Step 1


Before removing the product from the carton, detach and remove the plywood from the frame using screw driver as shown in the diagram.

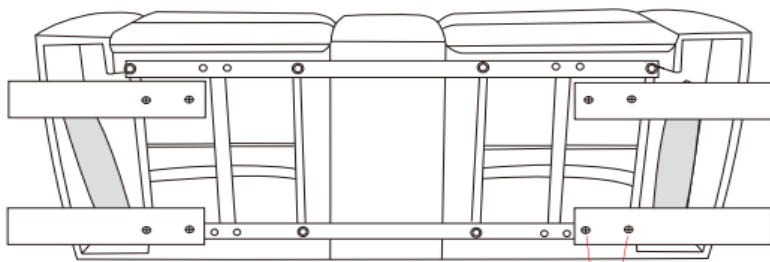

Screws' dim:5x80mm

Step 2

There are two wings under seats. Remove LAF Wing(E) and RAF Wing(F) from under seat. Meanwhile, untie the power cord.

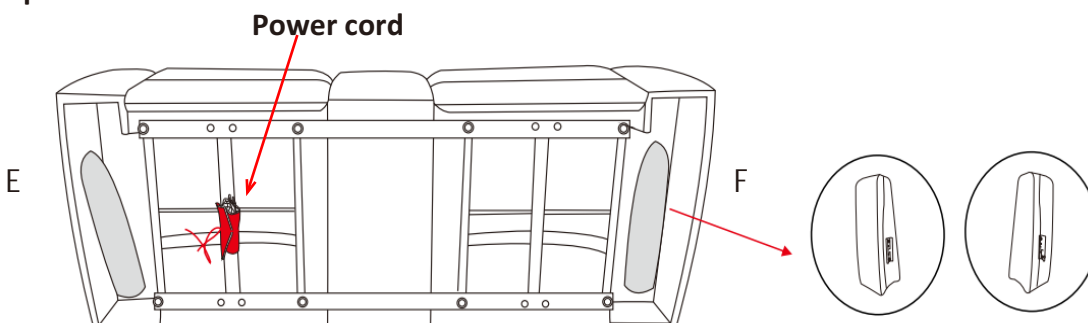

Step 3

1. Install the Backrest(B/D) into the Seat(A) by positioning the female metal receiver brackets on each side of the backrest line up with the seat metal posts. Push the female brackets down male posts simultaneously until each side is locked into place and an audible “click” is heard.
2. Install the LAF Wing(E) and RAF Wing(F) into by sliding wing in a downward motion along the side of the seat back to connect the brackets.
3. Install the Middle Back cushion by inserting 3 screws into predrilled holes on Console Body. Screw up from bottom to attach the console back.
4. Connect the wire.
5. Attach the flap to the seat frame by pulling the flap down, and pressing the bottom hem under the seat base, connecting the velcro.

